



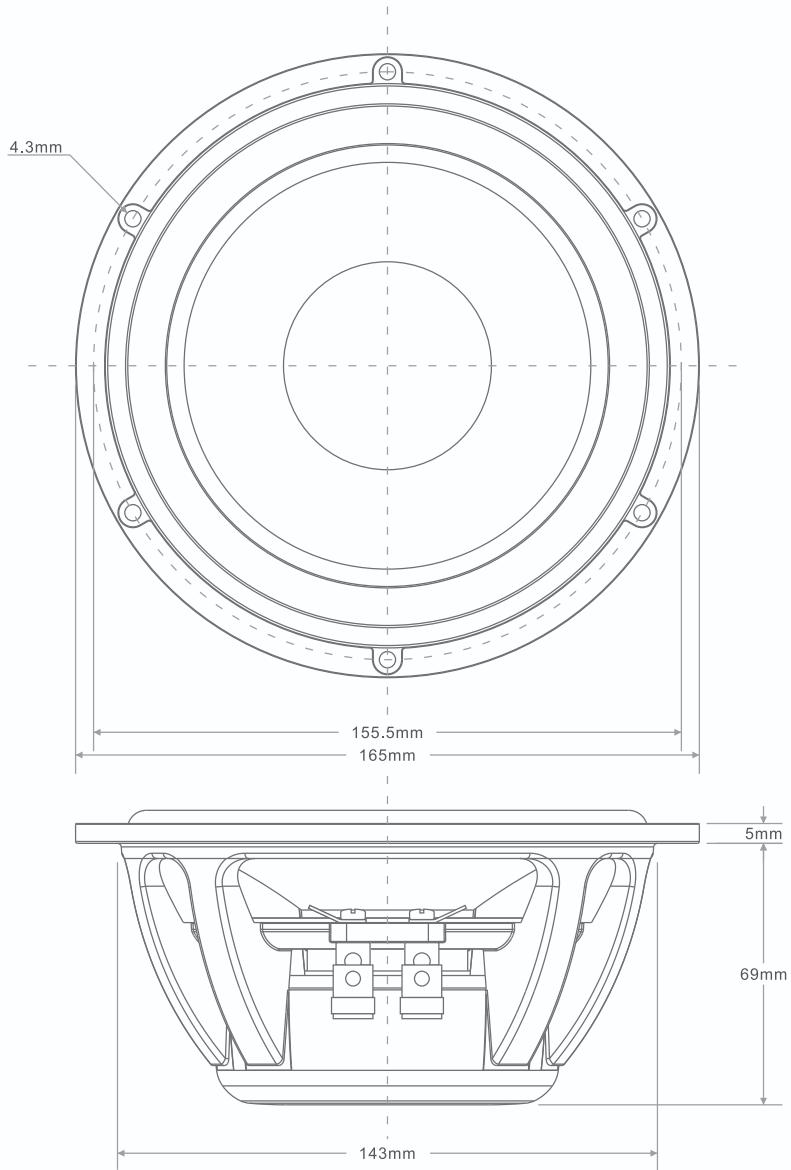


Speaker Dimension Drawing

SPL vs Freq

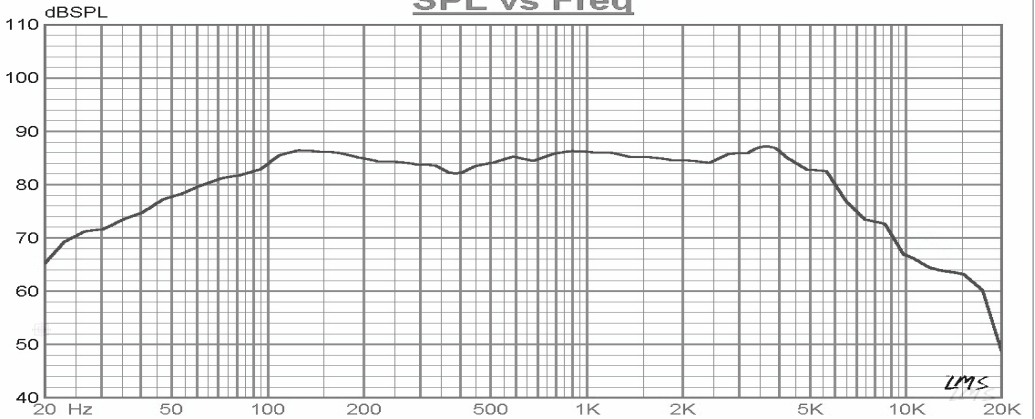

Impedance vs Freq

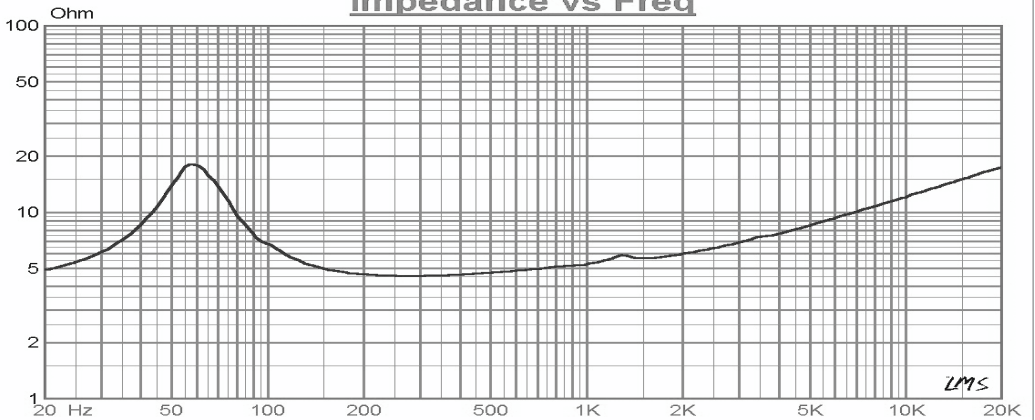

Nominal Impedance	4 Ohm	Frequency Response	65Hz-6KHz
Rated Power	80 W	Voice Coil Diameter	42mm/1.65in
Maximum Power	160 W	Cms	489.907u M/N
Revc	3.6 Ohm	Mmd	13.270m Kg
Fo	60.535 Hz	Mms	14.109 g
Sd	128.680 cm ²	BL	5.322 T
Krm	3.387m Ohm	Qms	2.232
Erm	0.682	Qes	0.682
Kxm	9.860m H	Qts	0.522
Exm	0.584	No	0.362%
Vas	11.519 Ltr	SPLo	87.609dB